


AL60 WALL SHIELD

Fast, Easy Installation Wall Shielding

Great material for RF, E-field shielding at room temperatures.

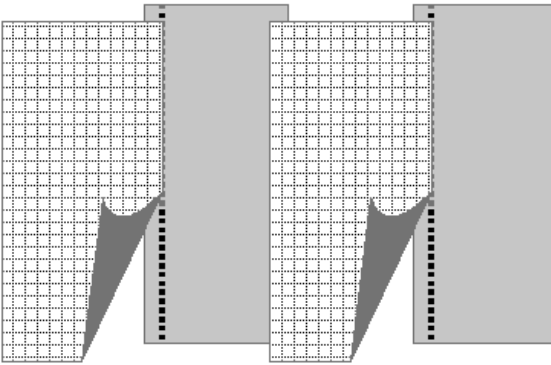

Cover walls, cables, electric panels and more. Polyester coated, very lightweight, tough & flexible, yet easy to cut with scissors. 39 inch wide, conductive on

one side. Apply to walls, ceilings, and other surfaces to achieve ~60dB at cell phone frequencies, and at least 40 dB from 100 MHz to 18 GHz.

Use ordinary spray adhesive on wall, then apply AL60 and press into place. Leave conductive side exposed for easy grounding. Apply 2 inch wide Aluminum tape over the seams. Non-conductive side holds latex paint well.

In addition, this material makes VERY effective shielded pouches, wallets, and sleeves. Will tolerate 32-122°F. 39 inch wide. 18 micron metal.

Care Instructions: Do not machine wash or dry clean. Dry brush or damp wipe only. Do not iron.

(Cat. #2273)

Available from:

Less EMF Inc. "The EMF Safety SuperStore"
776B Watervliet Shaker Rd Latham NY 12110-2209 USA

www.lessemf.com